



Digital programmable amplifiers
with high output level and selectivity

Mont Blanc

CAD-804 model

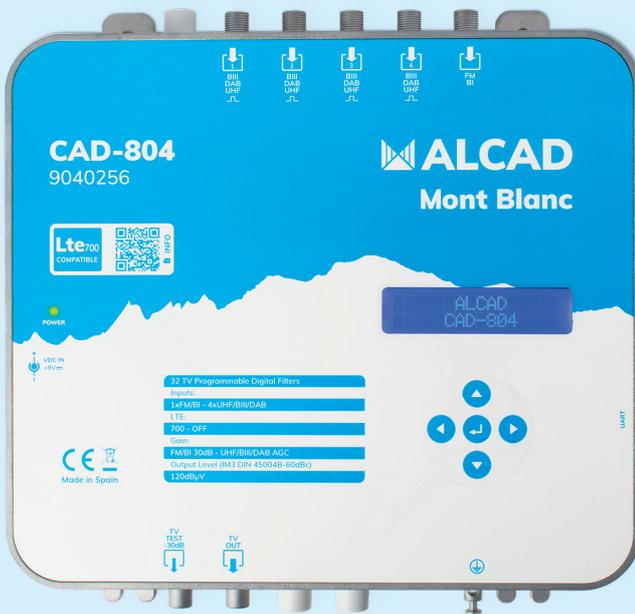

CAD-814 model

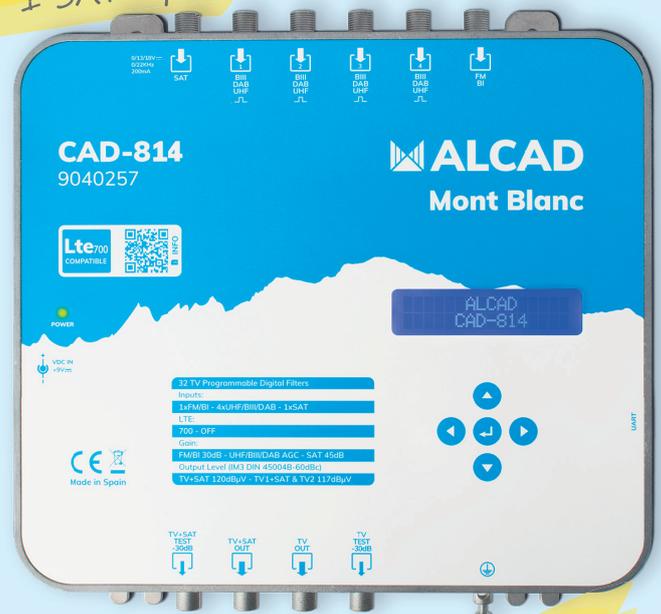

1 or 2 outputs
(compatible
with ICT2)

Output level *
120 dBμV

*DIN45004b -60dBc


- ▶ 32 programmable filters with high selectivity.
- ▶ LTE700 / No LTE.
- ▶ Easy and fast **autoconfiguration**.
- ▶ **External power supply** for easy maintenance.
- ▶ 4 UHF/BIII/DAB inputs + 1 FM/BI input.
- ▶ Channel **conversion**.
- ▶ **Automatic Gain Control** with output level adjustment.
- ▶ **Extra gain regulation** per channel.



Innovative
Developed and manufactured by ALCAD in Spain



Resistant
Robust chassis made of zamak



Easy to use
Configurable with 32-digit display and push-button panel



LTE700
Maximum protection against interference from 5G



Turn it on,
program it...
and go!

		9040256	9040257
		CAD-804	CAD-814
TERRESTRIAL			
Number of inputs		4xUHF/BIII/DAB 1xFM/BI	4xUHF/BIII/DAB 1xFM/BI
Frequency range	MHz	UHF(470.. 694/862) BIII/DAB (170.. 240) FM/BI(40.. 108)	UHF(470.. 694/862) BIII/DAB (170.. 240) FM/BI(40.. 108)
Programmable filters		32	32
Number of channels per filter		1	1
Input level	dB μ V	UHF/BIII/DAB 35.. 95 FM/BI 40.. 100	UHF/BIII/DAB 35.. 95 FM/BI 40.. 100
Selectivity	dB	40 @ 1MHz	40 @ 1MHz
Maximum gain	dB	UHF/BIII/DAB 80 FM/BI 30	UHF/BIII/DAB 80 FM/BI 30
Output level	dB μ V	1x 120 (IM3 DIN45004b -60dBc) 95.. 115 ajustable	1x 120 /2x 117 (IM3 DIN45004b -60dBc) 95.. 115 ajustable
Gain adjustment	dB	UHF CAG (50) FM ajustable (30)	UHF CAG (50) FM ajustable (30)
Equalization margin	dB	UHF 0.. 10	UHF 0.. 10
Noise figure	dB	<6	<6
SATELITE			
Number of inputs		-	1
Frequency range	MHz	-	950.. 2150
Input level	dB μ V	-	47.. 83
Maximum gain	dB	-	45
Output level	dB μ V	-	118 (IMD3 α -35dB)
Gain adjustment	dB	-	ajustable (20)
Noise figure	dB	-	<7
LNB power supply	Vdc	-	0/13/18/Bypass
	mA	-	350
	KHz	-	0/22
GENERAL			
Mains voltage	Vac	100.. 240	100.. 240
	W	11	13
External voltage	Vdc	9	9
	A	1	1,2+LNB
Operating temperature	$^{\circ}$ C	-10.. 60	-10.. 60
Dimensions	mm	215 x 218,4 x 45	215 x 218,4 x 45
Protection index		IP31	IP31